

CERTIFICATIONS

Formaldehyde emission



Biological durability
1. class




The products of EDELHOLZ Kft. comply to the quality requirements of the European market.



Materials originated from responsible forest management. (FSC® license number: C119075)

WALL PANEL STRUCTURE

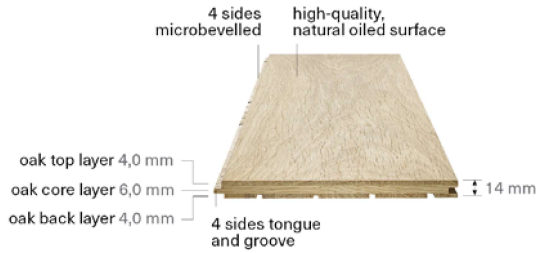

TRIPLEX, 3-LAYER STRUCTURE

TRIPLEX	
Structure	3-layer oak (4,0 mm oak top layer, 6,0 mm oak middle layer, 4,0 mm oak back layer)
Installation to wall heating 	Not suitable
Wood species	Hungarian oak from sustainably managed, state-owned forests
Thickness	14 mm
Width	140/180/220/240 mm
Length	140 / 180 mm width: 900-2400 (2700) mm 220 / 240 mm width: 1500 – 2400 (2700) mm
Length distribution	In fixed length produced, with 300 mm differences within the length range. Length tolerance: +/- 3.00 – 5.00 mm In random lengths delivered, in fair length distribution.
Construction	Tongue and groove on all four sides, microbevel on all four sides
Assortment	Rustic / Nature / Select
Surface treatment	Oxidative natural oil
Moisture content	5 – 9% (according to EN 13 489 standard)
Tensile strength	Approx. 2,8 – 3,5 N/mm ²
Weight	Approx. 10,5 kg/m ²
Installation	Screwing on sub-construction