

Certifications

Parquet

Parquet fire performance



Parquet formaldehyde emission



Parquet biological durability

1st class

Parquet slip resistance classification

On dry: R13

On wet: R12

According to DIN 51130 standard, tested by SRT method




The products of EDELHOLZ comply to the quality requirements of the European market.



Materials originated from responsible forest management. FSC® license number: C119075


Parquet structures

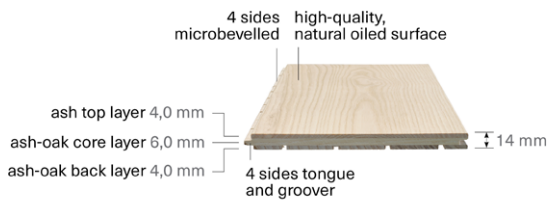

Triplex, 3-layer ash wood flooring

Triplex, 3-layer ash wood flooring. This extremely strong wooden flooring is the result of our unique production technology and the quality wood raw material. The Triplex flooring is the best choice in case of underfloor heating.

Triplex

Structure	3-layer ash (4,0 mm ash top layer, 6,0 mm ash-oak middle layer, 4,0 mm ash-oak back layer)
Installation to underfloor heating 	Suitable for hot water based underfloor heating
Wood species	Ash from sustainably managed, Hungarian, state-owned forests
Thickness	14 mm
Width	160 / 180 mm
Length	1200 - 2400 mm
Length distribution	In fixed length produced, with 300 mm differences within the length range. Length tolerance: +/- 3.00 – 5.00 mm In random lengths delivered, in fair length distribution.
Construction	Tongue and groove on all four sides, microbevel on all four sides
Assortment	Nature / Select
Surface treatment	Hardwax
Moisture content	5 – 9% (according to EN 13 489 standard)
Tensile strength	approx. 2.8 – 3.5 N/mm ²
Weight	approx. 10.5 kg/m ²
Installation	Floating method to Elastilon Strong, gluing or screwing down to subfloor
Thermal conductivity factor	λ : 0,14 W/(mK)