

NATURAL DRIED LIMESTONE NATURE


Art. Nr.: 155

Oxidative Limestone Nature oiled, deep-brushed surface, with patched knot-holes, fine bandsaw effect and bevels refined by hand on the long sides

This colour is upon personal request available as chateau plank.

Wood species: Hungarian oak from sustainably managed, state-owned forests

ASSORTMENT *

RUSTIC

A very lively assortment. Due to the colourfulness and diverse structure of natural wood this quality grade gives a real rustic effect.



NATURE

A slightly quieter assortment. This quality grade preserves the genuineness of wood while showing a more relaxed and uniform picture than the rustic one.



SELECT

Slight variation in colour and structure are showing the finest selection. The solid wood flooring presents itself uniform and quiet at the highest level.



*In case of some specific products only Nature-Rustic Mix or Nature-Select Mix is available.

CERTIFICATIONS

PARQUET

Parquet fire performance



C_{fl}-s1

Parquet formaldehyde emission



E1

Parquet biological durability

1st class

Parquet slip resistance classification

On dry: R13

On wet: R12

According to DIN 51130 standard, tested by SRT method



The products of EDELHOLZ comply to the quality requirements of the European market.



The mark of responsible forestry


Materials originated from responsible forest management. FSC® license number: C119075

PARQUET STRUCTURES




SOLID

Solid, 1-layer oak wood flooring. The classical structure and production process are the characteristics of the traditional solid oak wood flooring. This type of flooring provides an excellent solution for the renovation and restoration of historical interiors.

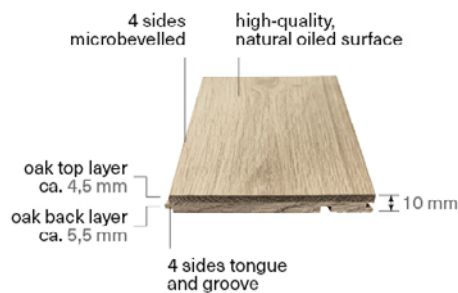

DUPLEX

Duplex, 2-layer oak wood flooring. An exceptionally thin wooden flooring, providing a quality solution for extremely low installation heights.

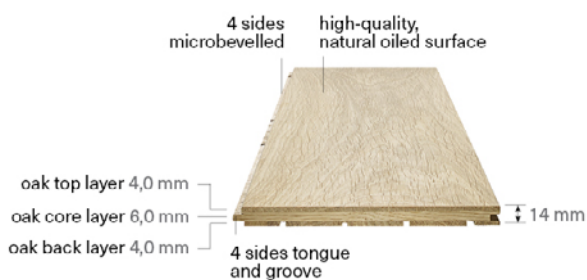

TRIPLEX

Triplex, 3-layer oak wood flooring. This extremely strong wooden flooring is the result of our unique production technology and the quality oak wood raw material. The Triplex flooring is the best choice in case of underfloor heating.

	SOLID	DUPLEX	TRIPLEX
Structure	1-layer solid oak wood flooring	2-layer oak (approx. 4.5 mm top-layer oak, approx. 5.5 mm back-layer oak)	3-layer oak (4.0 mm oak top layer, 6.0 mm oak middle layer, 4.0 mm oak back layer)
Installation to underfloor heating 	Not suitable for hot water based underfloor heating	Suitable for hot water based underfloor heating	
Wood species	Hungarian oak from sustainably managed, state-owned forests		
Thickness	20 mm	10 mm	14 mm
Width	140 / 160 mm	145 mm	180 / 220 / 240 mm
Length	500 – 2300 (2900) mm	1200 - 2100 mm	180 mm width: 900-2400 (2700) mm 220 / 240 mm width: 1500 – 2400 (2700) mm
Length distribution	Produced in random lengths. In random lengths delivered, in fair length distribution.	In fixed length produced, with 300 mm differences within the length range. Length tolerance: +/- 3.00 – 5.00 mm In random lengths delivered, in fair length distribution.	
Construction	Tongue and groove on all four sides, microbevel only on the long sides		
Assortment	Nature/Rustic/Select	Nature-Rustik MIX/Select	180/220 mm width: Nature/Rustic/Select, 240 mm width: Rustic/Nature-Select MIX
Surface treatment	Oxidative natural oil		
Moisture content	7 - 11 % (according to EN 13 629 standard)	5 – 9% (according to EN 13 489 standard)	
Tensile strength		approx. 2.8 – 3.5 N/mm²	
Weight	approx. 14.0 kg/m²	approx. 7.5 kg/m²	approx. 10.5 kg/m²
Installation	Floating method on Elastilon Strong, gluing or screwing down to subfloor	Gluing	Floating method on Elastilon Strong, gluing or screwing down to subfloor
Thermal conductivity factor	0.12 m² K/W (λ: 0.17)	0.06 m² K/W (λ: 0.17)	0.08 m² K/W (λ: 0.17)

SKIRTING


Wood species:

Hungarian oak
In random lengths produced,
without finger joints.
Same colour and finishing
as of the flooring.


Profile:

R6, the front edge is slightly
rounded, and the bottom is slant cut.
Bevelled on the back for the
cabel duct.

Dimensions:

40x20 mm, 60x20 mm

WOOD STAIR NOSING PROFILE

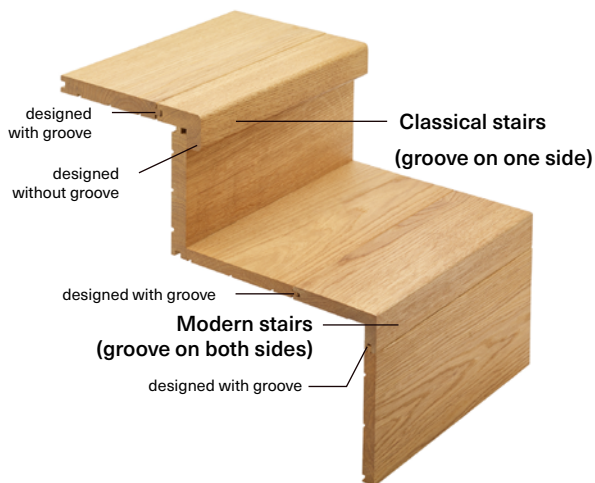
Wood species:

Hungarian oak
Made of one piece of wood.
Same colour and finishing as of
the flooring.

Profile:

Groove on both sides or on one
side. Rounded (R6) or bevelled.

Dimensions:

40x100x1000/
1200/1500/1700/2000 mm

RECOMMENDED PRODUCTS FOR MAINTENANCE

Regular, basic cleaning:
ON – Woodsoap

Initial care:
ON - Wood Care Wax